

# LUXORliving B6

Item no.: 4800430

**theben**

Home and Building control  
LUXORliving

## Description

- 6-way binary input LUXORliving
- 6 floating universal and wide-range voltage inputs (10-240 V AC/DC or internally generated auxiliary voltage of approx. 12 V DC)
- Software functions: Switch/push-button, dimming, blinds
- LED switching status display for each channel
- Manual operation on device
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



## Technical data

LUXORliving B6	
Operating voltage	110 – 240 V AC
Stand-by consumption	<0.3 W
Width	4 modules
Installation type	DIN rail
Output	12 V DC/18 mA, SELV

LUXORliving B6	
Display	6 LEDs zur Anzeige des Zustandes am Eingang
Suitable for SELV	Yes, if all inputs are connected with SELV
Type of protection	IP 20
Protection class	II according to EN 60 730-1

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800430](http://www.theben.de/product/4800430)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# LUXORliving B6


Item no.: 4800430



## Connection example



## Scale drawings

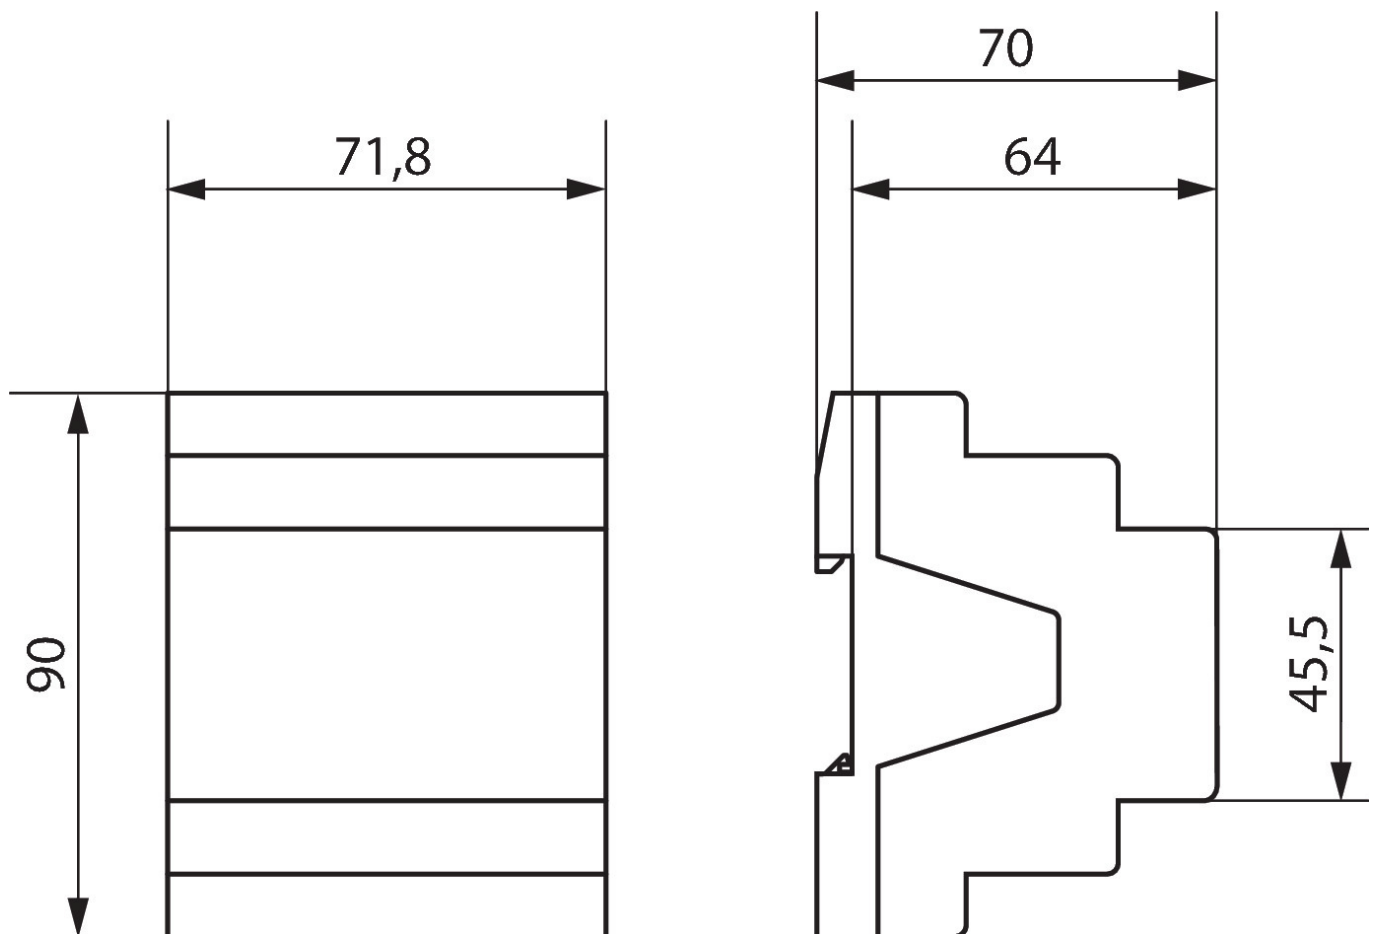

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800430](http://www.theben.de/product/4800430)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.