

theLeda S8-100L WH

Item no.: 1020600

theben

LED-Strahler
theLeda S

Description

- LED spotlight with 8,5 W
- Colour temperature 4000 K
- Wall mounting
- Spotlight can be swivelled $\pm 40^\circ$ horizontally, and adjusted 70° downwards, wall-wash functionality by swivelling 180°
- Suitable for outdoor use
- Networkable via wire



Technical data

| theLeda S8-100L WH | |
|-------------------------------|--------------------------|
| Operating voltage | 230 V AC |
| Frequency | 50 Hz |
| Stand-by consumption | ~0.5 W |
| Colour | White (similar RAL 9010) |
| Switching output | Light |
| Installation type | Wall installation |
| LED output (lighting current) | 900 lm |
| Colour temperature | 4000 K, neutral white |

| theLeda S8-100L WH | |
|------------------------|---|
| Colour rendering index | < 80 |
| Service life | L80/B10/45.000 h L70/ B50/50.000 h |
| Installation height | 1.8 – 2.5 m |
| Ambient temperature | -20°C ... 55°C |
| Protection class | II |
| Type of protection | IP 55 |

Subject to technical changes and misprints

additional information at: www.theben.de/product/1020600


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theLeda S8-100L WH


Item no.: 1020600

theben

Connection example




Scale drawings

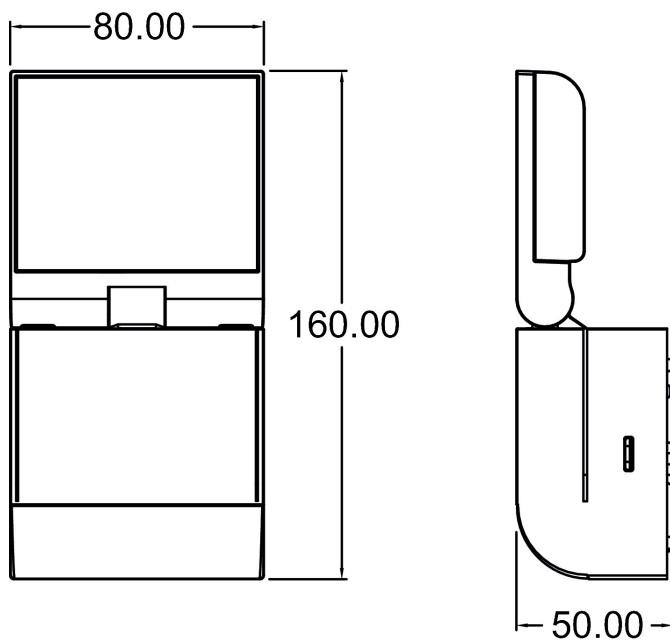

Accessories

Corner angle 10 WH
Item no.: 9070969



Spacer 10 WH
Item no.: 9070971



Subject to technical changes and misprints

additional information at: www.theben.de/product/1020600

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.