



DATA SHEET

operating current trip

FAM 1

for RCCB/MCB one-pole+N design Type A

Article number 09950011



Function

Operating current trips enable the remote tripping of, e.g. miniature circuit-breakers. The operating current trip is activated by an operating current from an external voltage source. The FAM 1 remote tripping module is a tripping device for residual current operated circuit-breakers with integral overcurrent protection (RCBOs, single-pole+N) as well as for miniature circuit-breakers from series ELS 3. The remote tripping module contains one resistor and one interrupter contact in a 0.5 unit wide, retro-fittable housing. When a voltage of 230 V or 400 V is switched on via the resistor and a tripping current is generated, the residual current operated circuit-breakers with integral overcurrent protection and rated residual currents up to 0.3 A are safely switched off, even when long cable lengths to remote switches or contacts have been laid. Remote switch-off takes place when an external contact is used to switch on a voltage; no remote test is performed. A standard-compliant tripping test is therefore not carried out. After the circuit-breaker trips, the interrupter contact prevents the tripping voltage from being diverted to the consumer system as long as the switch remains closed (safety shutdown).

Features

retrofitable, compact design

Mounting

mounting to the left side of the RCBO, quick fastening to mounting rail, any installation position

Applications

The FAM 1 is suitable for switching off power supply circuits in residential and purpose-built buildings as well as industrial facilities using fault and hazard alarm equipment.

Notes

does not affect the RCBO function, not suitable for operation-relevant switching


Technical Data

Technical Data	FAM 1
Series	FAM 1
suitable for model range	DRCBO 3, ELS 3
Mounting side	left
Operating voltage (AC)	230 V, 400 V (207 V ... 440 V)
Operating frequency	50 Hz ... 60 Hz
	lift terminal, captive top and bottom (control input)
Connection C1 Maximum number of conductors per terminal	2
Cross section solid	1-wire: 1 mm ² ... 2.5 mm ² ; 2-wire: 1 mm ² ... 2.5 mm ²
Tightening torque	0.8 Nm ... 1 Nm
	General data
Duty cycle	continuous operation (Duty cycle ≤ 100 %, at U _e)
Operating position	optional
Housing type	distribution board housing
Installation type	Mounting rail (35 mm), Device extension
Housing material	thermoplastic
Protection class	IP20 (installed: IP40)

Subject to technical changes


Technical Data	FAM 1
Width	9 mm
Height	80 mm
Depth	70 mm
Installation depth	64 mm
Module widths	0.5
Weight	0.036 kg

Dimensions



Dimensional drawing Group view

Wiring example

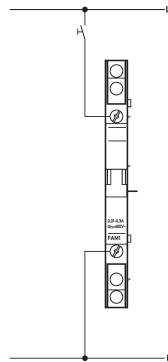

Wiring diagram