

DALI-Gateway KNX plus


Item no.: 9070929



DALI
DALI-Gateways und -Aktoren

Description

- The DALI Gateway KNX serves as an interface between the the DALI and the KNX system
- A maximum of 64 DALI members can be connected to a DALI output
- Individual control of up to 64 ECGs possible
- Up to 16 groups can be switched, dimmed or set to a defined value
- Operation of single battery emergency lamps according to EN 62386-202
- Emergency lighting systems with central battery are also supported
- Support of DALI "Device Type 8" (DT8) for controlling light color, brightness and color temperature
- Status and error information for a visualization
- Scene module for up to 16 different groups
- Effect module for sequencers
- LC display (2x 12 characters) for menu guidance during start-up and parameter settings
- The DALI start-up takes place via the control elements on the device, via the integrated web server or via the ETS plug-in

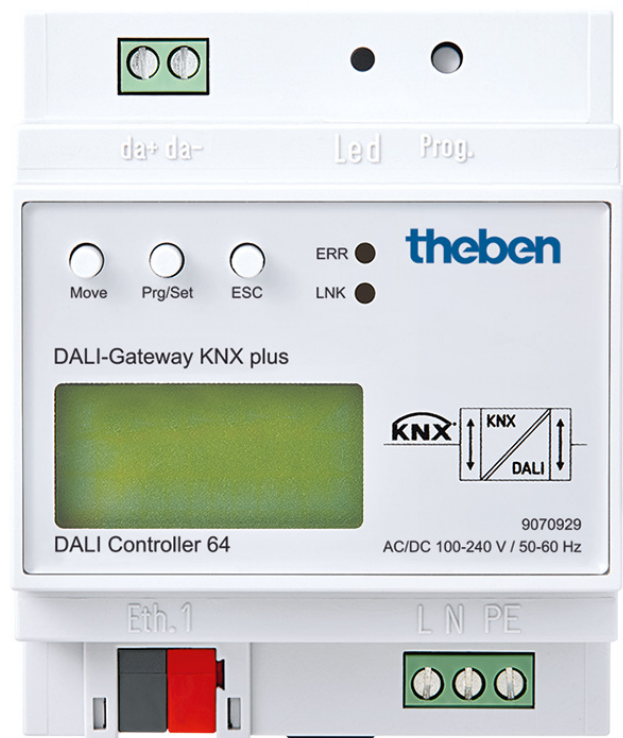

Technical data

DALI-Gateway KNX plus	
Operating voltage KNX	Bus voltage, <10 mA
Operating voltage	100 – 240 V AC/DC 50 – 60 Hz
Frequency	50 – 60 Hz
Width	4 modules
Installation type	DIN rail

DALI-Gateway KNX plus	
Type of connection	Terminal screws Bus connection: KNX bus terminal
Ambient temperature	-5°C ... 45°C
Stock temperature	-25°C ... 70°C
Protection class	I
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070929

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.